



Handle Drums with Precision and Ease!

Turn drum handling into a smooth, one-operator workflow with the Dumper Upender. This fully hydraulic system securely clamps, lifts, and rotates drums a full 180°, giving operators complete control for fast dumping or precise, controlled pouring. More than a drum handler, it's a productivity-driven attachment built to reduce labor, improve safety, and keep material moving efficiently.



DUMPER UPENDER

KEY FEATURES

- Fully Hydraulic Clamping & Dumping - No chains needed
- 180° Tilt - Allows for precise and controlled pouring or dumping
- Optional Side Shift Function - Enhances maneuverability
- High-Capacity Carriage Mounting - Compatible with ITA Class II (3,000 lbs.), Class III (4,000 lbs.), and Class IV (5,000 lbs.)
- Equal Arm Movement - Ensures balanced gripping power from both sides for secure handling
- Removable Dumper Jaws - Converts into a fully functional fork clamp
- Optional Flat Pads - Additional functionality for handling non-drum loads



HOW IT WORKS




Designed for seamless operation, this powerful attachment securely clamps onto drums and tilts them a full 180°, allowing operators to quickly dump or slowly pour materials without leaving their seat. Eliminating the need for manual chains or additional labor, the Dumper Upender transforms time-consuming and hazardous drum handling into a one-person job.



Approach the drum with the dumper jaws spread apart. Slowly clamp the jaws around the drum, applying enough pressure to hold it securely.



Lift and move the drum to the desired dumping or pouring location. Using the hydraulic controls, tilt the dumper jaws to dump or slowly pour the contents.

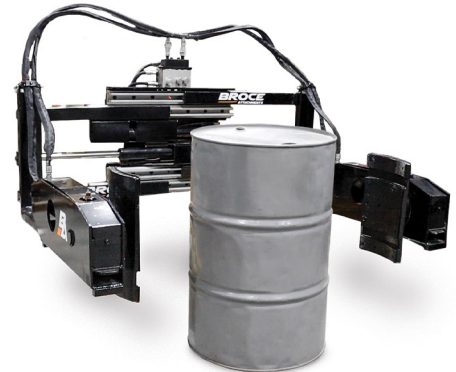

Once the drum is emptied, tilt it back to the upright position. Lower the drum and spread the clamps to release it.

HANDLE MORE WITH EASE

Built to withstand rigorous industrial use, it is available in ITA Class II, Class III, and Class IV carriage mounts, with lifting capacities of 3,000, 4,000, and 5,000 lbs, respectively. An optional side-shifting function enhances maneuverability, while equal-arm movement technology ensures balanced gripping power on both sides. For even greater versatility, the tilting jaws can be removed, allowing the unit to function as a fully operational fork clamp. Optional flat pads are also available for handling non-drum loads.

Dual Hydraulic Function - Dumper Upender

(S) - Triple Hydraulic Function - Side-Shifting Dumper Upender

Model No.	Capacity @ 24" L.C. (lbs.)	Mounting Class	Opening Range w/ Dumpers (in.)	Fork Length (in.)	Lifting Capacity w/ Dumpers (in.)	Body Width (in.)	O.A.C.L. (in.)	Weight (lbs.)
SDUC31A	3000	II	11-59	36	2000	35	32.5	700
SDUC32A	3000	II	11-59	42	1800	35	38.5	725
SDUC33A	3000	II	11-59	48	1500	35	44.5	750
SDUC41A	4000	II	11-59	36	3000	36	33.5	830
SDUC42A	4000	II	11-59	42	2500	36	39.5	850
SDUC43A	4000	II	11-59	48	2000	36	45.5	870
SDUC51A	5000	II	13-65	36	400	40	34.5	1250
SDUC52A	5000	II	13-65	42	3500	40	40.5	1270
SDUC53A	5000	II	13-65	48	3000	40	46.5	1290

*Add 7" for operating range without dumper

*Pressure regulator valve is recommended for all applications

Broce Manufacturing Co.



Website
www.brocebroom.com

Phone
(580) 227-3711

Address
201 W Oklahoma, Fairview, OK 73737

