

A LITTLE FOOTPRINT,
A LOT OF FUNCTIONS.



DIMENSIONS

OVERALL LENGTH	12' 6"
WIDTH FOR TRANSPORT	8'
OVERALL HEIGHT	7' 10"
INSIDE TURNING RADIUS	5'
WEIGHT (STANDARD UNIT)	3,000 LBS



250 **SERIES**
THREE-WHEEL SWEEPER

SMALL BUT
MIGHTY.

250 SERIES OPTIONAL EQUIPMENT

- 6' Broom
- 2" or 2 5/16" Ball Hitch or 3" Pintle Eye Hitch
- Amber Beacon Light
- Front Work Lights & Rear Taillights
- Rear Work Lights (2 Single Beam)
- Hub Disconnect Warning Light
- Custom Paint Color
- Engine Shutdown Safety System
- Windshield
- Traffic Horn
- Half & Half Poly/Wire Wafers
- Variable Speed Brush



TURF BOSS

The 250 is not limited to cleaning up golf kart paths and small municipality sweeping. The Turf Boss option includes extra wide wheels, a severe duty radiator, and custom brush made to spread and maintain artificial turf.



BROCE
MFG.

1460 S 2nd Ave,
Dodge City, KS 67801

www.brocebroom.com
www.brocebroomparts.com

Sales: 866-579-2488
Parts & Service: 877-227-8811
BW260 & 470 Series Parts: 580-227-3711

250 SERIES

THE ALL-STAR

STANDARD EQUIPMENT SPECS

BODY	
CERTIFIED ROLL OVER STRUCTURE & CANOPY COMPLIES WITH ISO3471	
PADDED SEAT W/ ARM REST & SEAT BELTS, COMPLIES W/ ISO 6683	
STEERING	ORBITAL-TYPE POWER STEERING W/ DEAD STEER CAPABILITIES 60° (BOTH WAYS)
BRAKES	TWO-WHEEL HYDRAULIC DRUM BRAKES W/MANUAL PARKING BRAKE
WHEELS	5 X 4 ½ BOLT PATTERN
TIRES	P185/75R14
TOW HITCH	SELECTABLE COUPLING STYLE W/ SURGE BRAKE & TOW LIGHTS
INSTRUMENT PANEL	OIL, WATER, ALTERNATOR, FUEL & HOUR METER
ALARMS	REVERSE ALARM
COLOR	SAFETY ORANGE PAINT

ENGINE/DRIVETRAIN	
ENGINE	KUBOTA V 1505 DIESEL ENGINE-4 CYLINDER
HORSEPOWER	24 HP
RATED SPEED	2300 RPM
EMISSION RATING	TIER 4 FINAL
MAX TRAVEL SPEED	10 MPH
FUEL CAPACITY	9 US GAL
AIR CLEANER	DUAL ELEMENT TYPE W/ PRECLEANER

HYDRAULICS	
TANK CAPACITY	15 GAL
OPERATING PRESSURE	STEERING: 1500 PSI BRUSH: 3000 PSI PROPEL: 2755 PSI
PUMP CAPACITY	
GEAR PUMP	PRIORITY (STEERING): 3 GPM EXCESS (BRUSH): 20 GPM
HYDROSTAT	16 GPM
FILTER	SUCTION: 100 MESH STRAINER RETURN: 10-MICRON FILTER

BRUSH SPECS	
BRUSH CORE	8 FT, STEEL WELDED
BRUSH FILLER	6 ¾" X 24" FLAT POLY WAFERS
BRUSH DRIVE	DIRECT DRIVE SINGLE HYDRAULIC MOTOR, 192 RPM
CORE COVER	14-GAUGE STEEL
SWEEPING ANGLE	40° LEFT OR RIGHT
SWEEPING WIDTH	8 FT
BROOM CONTROLS	TWO SPOOL JOYSTICK VALVE W/ ADJ. DOWN PRESSURE AND FLOAT POSITION
WATER TANK	TWO 36-GALLON TANKS
WATER SYSTEM	8' GALVANIZED STEEL SPRAY BAR W/ 8 SPRAY NOZZLES



100% BRUSH VISABILITY

Increase your broom efficiency & job site safety. The 250 design allows operators to clearly see the brush & road at all times.



HYDROSTATIC FOOT CONTROL

The intuitive controls and rocker pedal will keep your workflow running smoothly.




JOYSTICK CONTROL

Put those hours spent gaming on your mom's couch to good use. Easy access joy stick, easy maneuver broom.



HYDRAULIC TOW HITCH

No trailer needed. The 250 series includes a hydraulically powered tow hitch + coupler with mechanical brakes. The powered hitch lifts the machine's front wheel off the ground for more stable towing at higher speeds.

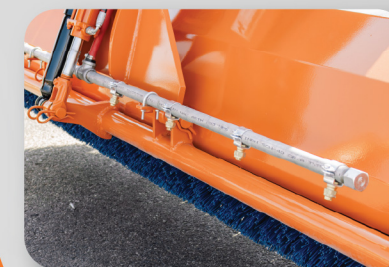

WATER SPRAY SYSTEM

Keep dust down and productivity up with the 250's two-36-gallon water tank system. A 2.5 GPM electric pump feeds eight spray nozzles for consistent, effective dust control.

5' TURNING RADIUS

Say yes to more jobs when you add the agile 250 Broce Broom to your roster.



HEAVY-DUTY SHOCK ABSORBER

The included heavy-duty shock absorber is not just for your operators. It also ensures your Broce Broom core will last longer than others. Talk about a good deal!



"PULL" MOUNTED BROOM

Sweep smarter, not harder, with Broce's pull-broom, which guarantees smoother contact to the surface.



SINGLE DIRECT DRIVE BRUSH MOTOR

When it comes to construction sweepers, this is the motor that really matters. The single motor design puts all the focus (and the torque) on the brush RMPs so you can put your focus where it matters too.

Broce Broom

DEMOS AVAILABLE! CONTACT YOUR REGIONAL SALES MANAGER FOR A FREE DEMO OR CALL 866-579-2488

Sales: 866-579-2488
Parts & Service: 877-227-8811