

MEET YOUR NEW RENTAL FLEET.



DIMENSIONS	
OVERALL LENGTH	13' 3"
WIDTH FOR TRANSPORT	8' 4"
OVERALL HEIGHT	8'
TURNING RADIUS	5'
WEIGHT (STANDARD UNIT)	3,100 LBS
WEIGHT (CAB UNIT)	3,300 LBS



BW260

GOOD QUALITY,
GREAT PRICE!

BW260 OPTIONAL EQUIPMENT

- Enclosed Cab
- Windshield Wipers
- Air Conditioning
- Heater
- Traffic Horn
- Hub Disconnect Warning System
- Strobe Light
- Front & Rear Work Lights
- Rotating Beacon
- 1/2 Poly, 1/2 Wire Brush
- Towing Configurations
 - 2" Ball
 - 2" Ball - Adjustable Height
 - 2 5/16" Ball - Adjustable Height
 - Pintle Hitch - Adjustable Height
- Variable Broom Speed
- Reversible Broom Speed
- 6 FT Broom
- Paint Color



MORE WAYS TO SWEEP



201 W Oklahoma,
Fairview, OK 73737

www.brocebroom.com
www.brocebroomparts.com

Sales: 866-579-2488
Parts & Service: 877-227-8811
BW260 & 470 Series Parts: 580-227-3711



BW260

THE BROCE OF ALL TRADES



ENCLOSED DASH

Avoid maintenance, injury, and vandalism with an enclosed dash that keeps all your wiring and hydraulics protected and organized.



STEEL ENGINE COVER

We believe your equipment shouldn't warp and break with everyday use. That's why the BW260 is built with American steel, not foreign plastics.



"PULL" MOUNTED BROOM

Save money with less broom wear.
Save time with a cleaner sweep, needing less passes.
Save your team with less maintenance.




5' TURNING RADIUS

Easily maneuver tight spaces.
Say yes to the tricky jobs.



POWER WHERE IT MATTERS

Move the most debris with a 190rpm broom speed and 10mph travel speed.
Go ahead, ask the other guys for their specs.

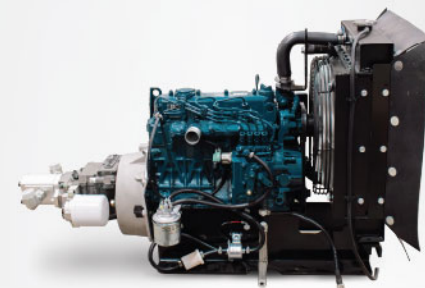

BEST IN CLASS ENGINE TORQUE

30% more engine torque than competitors due to a 4-cylinder Kubota engine option.



DUST SUPPRESSION

Cut down dust and keep your job site clean with our complete dust control water system, featuring two 36-gallon tanks, a 2 GPM ShurFlo pump, and an inline strainer.



ENCLOSED CAB: OPTIONAL

Worker safety, your comfort, and unapologetic style.
Stay cool and don't get overheated on the job.

STANDARD EQUIPMENT SPECS

BODY

CERTIFIED ROLL OVER STRUCTURE & CANOPY COMPLIES WITH ISO3471	
STEERING	ORBITAL-TYPE POWER STEERING
BRAKES	TWO REAR WHEEL DRUM BRAKES W/ MECHANICAL PARKING BRAKE
WHEELS	5 X 4 1/2 BOLT PATTERN
TIRES	P205/75R14
COLOR	SAFETY RED

ENGINE/DRIVETRAIN

ENGINE	KUBOTA V1505 DIESEL - 4 CYLINDER YANMAR 3TNV80FT-ZYMA DIESEL - 3 CYLINDER
HORSEPOWER	24 HP
RATED SPEED	2300-2700 RPM (ENGINE DEPENDENT)
EMISSION RATING	TIER 4 FINAL
MAX TRAVEL SPEED	10 MPH
FUEL CAPACITY	11 US GAL
AIR CLEANER	DUAL ELEMENT TYPE W/ PRECLEANER

HYDRAULICS

TANK CAPACITY	12 US GAL
OPERATING PRESSURE	2,800 PSI
PUMP CAPACITY	18 GPM @ 2700 RPM
FILTER	SUCTION: 100 MESH STRAINER RETURN: 10-MICRON FILTER

BRUSH

BRUSH CORE	8 FT, STEEL WELDED
BRUSH FILLER	6 3/4" X 24" CONVOLUTED POLY WAFERS
BRUSH DRIVE	DIRECT DRIVE MOTOR, 180-200 RPM UNDER LOAD
CORE COVER	135°, 14-GAUGE STEEL
SWEEPING ANGLE	40° LEFT OR RIGHT
SWEEPING WIDTH	8 FT
BROOM CONTROLS	SINGLE LEVER JOYSTICK CONTROL VALVE W/ ADJUSTABLE DOWN PRESSURE & FLOAT POSITION
WATER TANK	TWO 36-GALLON TANKS
WATER SYSTEM	8' GALVANIZED STEEL SPRAY BAR W/ 8 SPRAY NOZZLES

CAB

PADDED SEAT W/ ARM REST & SEAT BELT		
INSTRUMENTS & CONTROLS:		
• CORE ANGLING	• BROOM DRIVE CONTROLS	• FUEL GAUGE
• OIL PRESSURE	• WATER TEMPERATURE	• BRAKES
• VOLT METER	• ENGINE THROTTLE	• REVERSE ALARM
• TACHOMETER	• DIRECTIONAL CONTROL	• REAR VIEW MIRROR
• CORE HEIGHT	• HOUR METER	• FAN
• PARKING BRAKE W/ ENGAGING LIGHT		

Broce Broom

DEMOS AVAILABLE! CONTACT YOUR REGIONAL SALES MANAGER FOR A FREE DEMO OR CALL 866-579-2488

Sales: 866-579-2488
Parts & Service: 580-227-3711